


TYPICAL SKETCH OF GARLAND IMPACT IDLER

It shall be deemed to be treated that the agency have verified the arrangement at purchaser's site and the supplies shall fit have one to one fitment.


EQUAL ROLLERS

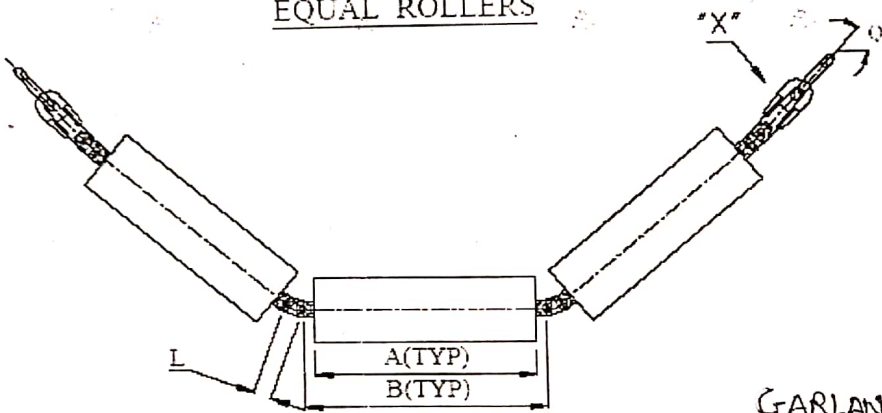

GARLAND TYPE IMPACT IDLER

3 ROLL, 35 DEG TROUGHED  
 EACH ROLL SHALL BE MADE OF 139.7mm dia., 4.85mm thick with 190mm OD  
 Rubber Ring with 60±5 degree on 'A' scale, 35mm Dia, 6207 Z  
 Bearing shall be of SKF/fag make  
 D-shackle Capacity = 1 Ton.

END ARRANGEMENT TYPES.



A = 670mm  
 B = 750mm